

## 30KP Series

### Description

The 30KP Series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

### Features

- Halogen free and RoHS compliant
- Glass passivated junction
- Low incremental surge resistance.
- Excellent clamping capability
- 30000W peak pulse power capability at 10/1000 $\mu$ s waveform, repetition rate (duty cycle): 0.05%
- Fast response time
- Typical IR less than 2 $\mu$ A above 64V devices
- High Temperature soldering guaranteed: 265 $^{\circ}$ C/10 seconds/.375", (9.5mm) lead length, 5lbs (2.3kg) tension
- Plastic package has underwriters laboratory flammability 94V-0
- Meets MSL level 1, per J-STD-020.
- IEC-61000-4-2 ESD 30kV(Air), 30kV (Contact)
- Weight: 2.46g



### Applications

TVS components are ideal for the protection of I/O interfaces,  $V_{CC}$  bus and other vulnerable circuits used in telecom, computer, industrial and consumer electronic applications.

### Maximum Ratings and Characteristics


Ratings at 25 $^{\circ}$ C ambient temperature unless otherwise specified.

Rating	Symbol	Value	Units
Peak pulse power dissipation at 10/1000 $\mu$ s waveform	$P_{PPM}$	Minimum 30000	Watts
Peak pulse current of at 10/1000 $\mu$ s waveform	$I_{PPM}$	See Table	Amps
Steady state power dissipation at $T_L=75^{\circ}$ C	$P_{M(AV)}$	8.0	Watts
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load, (JEDEC Method)	$I_{FSM}$	400	Amps
Operating junction and Storage Temperature Ranges.	$T_J, T_{STG}$	-55 to +150	$^{\circ}$ C
Typical thermal resistance junction to lead	$R_{\theta JL}$	8.0	$^{\circ}$ C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	40	$^{\circ}$ C/W

Notes: 1. Non-repetitive current pulse, per Fig.3 and derated above  $T_A=25^{\circ}$ C per Fig.2.

2. 8.3ms single half sine-wave, or equivalent square wave, duty cycle=4 pulses per minutes maximum.

### Dimensions (P600)

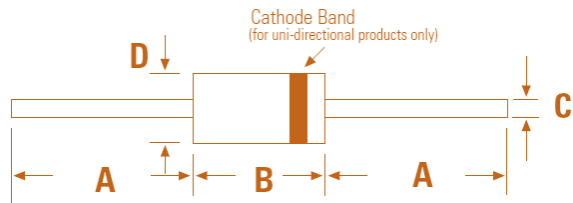	Inches		Millimeters	
	Dimensions	Min	Max	Min
A	1.000	--	25.40	--
B	0.340	0.360	8.60	9.10
C	0.047	0.053	1.19	1.35
D	0.340	0.360	8.60	9.10

### Electrical Characteristics (TA=25°C)

Part Number		Reverse Stand-Off Voltage	Breakdown Voltage @I <sub>T</sub>		Test Current	Maximum Clamping Voltage @I <sub>PP</sub>	Peak Pulse Current	Reverse Leakage @V <sub>R</sub>
Uni	Bi	V <sub>R</sub> (V)	Min(V)	Max(V)	I <sub>T</sub> (mA)	V <sub>C</sub> (V)	I <sub>PP</sub> (A)	I <sub>R</sub> (μA)
30KPA28A	30KPA28CA	28.0	31.28	34.57	50	50.0	606.0	2500
30KPA30A	30KPA30CA	30.0	33.51	37.04	50	55.2	548.9	2000
30KPA33A	30KPA33CA	33.0	36.90	40.78	50	58.5	517.9	1500
30KPA36A	30KPA36CA	36.0	40.20	44.43	50	61.8	490.3	1000
30KPA39A	30KPA39CA	39.0	43.60	48.19	20	67.2	450.9	800
30KPA42A	30KPA42CA	42.0	46.90	51.84	10	72.0	420.8	200
30KPA43A	30KPA43CA	43.0	48.00	53.05	10	73.0	415.1	150
30KPA45A	30KPA45CA	45.0	50.30	55.59	5	77.4	391.5	30
30KPA48A	30KPA48CA	48.0	53.60	59.24	5	81.6	371.3	15
30KPA51A	30KPA51CA	51.0	57.00	63.00	5	86.4	350.7	10
30KPA54A	30KPA54CA	54.0	60.30	66.65	5	91.4	331.5	5
30KPA58A	30KPA58CA	58.0	64.80	71.62	5	92.4	327.9	5
30KPA60A	30KPA60CA	60.0	67.00	74.05	5	102.0	297.1	5
30KPA64A	30KPA64CA	64.0	71.50	79.03	5	104.0	291.3	5
30KPA66A	30KPA66CA	66.0	73.70	81.46	5	107.0	283.2	2
30KPA70A	30KPA70CA	70.0	78.20	86.43	5	109.0	278.0	2
30KPA71A	30KPA71CA	71.0	79.30	87.65	5	111.5	271.7	2
30KPA72A	30KPA72CA	72.0	80.40	88.86	5	114.0	265.8	2
30KPA75A	30KPA75CA	75.0	83.80	92.62	5	119.4	253.8	2

### Electrical Characteristics (TA=25°C)

Part Number		Reverse Stand-Off Voltage	Breakdown Voltage @I <sub>T</sub>		Test Current	Maximum Clamping Voltage @I <sub>PP</sub>	Peak Pulse Current	Reverse Leakage @V <sub>R</sub>
Uni	Bi	V <sub>R</sub> (V)	Min(V)	Max(V)	I <sub>T</sub> (mA)	V <sub>C</sub> (V)	I <sub>PP</sub> (A)	I <sub>R</sub> (μA)
30KPA78A	30KPA78CA	78.0	87.10	96.27	5	129.0	234.9	2
30KPA84A	30KPA84CA	84.0	93.80	103.67	5	139.2	217.7	2
30KPA90A	30KPA90CA	90.0	100.50	111.08	5	146.4	207.0	2
30KPA96A	30KPA96CA	96.0	107.20	118.48	5	156.0	194.2	2
30KPA102A	30KPA102CA	102.0	113.90	125.89	5	165.6	183.0	2
30KPA108A	30KPA108CA	108.0	120.60	133.29	5	175.2	172.9	2
30KPA120A	30KPA120CA	120.0	134.00	148.11	5	194.4	155.9	2
30KPA132A	30KPA132CA	132.0	147.40	162.92	5	213.0	142.3	2
30KPA144A	30KPA144CA	144.0	160.80	177.73	5	223.2	135.8	2
30KPA150A	30KPA150CA	150.0	167.60	185.24	5	233.4	129.8	2
30KPA156A	30KPA156CA	156.0	174.30	192.65	5	245.0	123.7	2
30KPA160A	30KPA160CA	160.0	178.70	197.51	5	252.6	120.0	2
30KPA168A	30KPA168CA	168.0	187.70	207.46	5	272.4	111.2	2
30KPA170A	30KPA170CA	170.0	189.90	209.89	5	275.0	110.2	2
30KPA180A	30KPA180CA	180.0	201.10	222.27	5	290.4	104.3	2
30KPA198A	30KPA198CA	198.0	221.20	244.48	5	319.8	94.7	2
30KPA216A	30KPA216CA	216.0	241.30	266.70	5	348.6	86.9	2
30KPA240A	30KPA240CA	240.0	268.10	296.32	5	387.0	78.3	2
30KPA258A	30KPA258CA	258.0	288.20	318.54	5	416.4	72.8	2
30KPA260A	30KPA260CA	260.0	290.40	320.97	5	416.0	72.8	2
30KPA270A	30KPA270CA	270.0	301.60	333.35	5	436.2	69.5	2
30KPA280A	30KPA280CA	280.0	312.80	345.73	5	464.0	65.3	2
30KPA288A	30KPA288CA	288.0	321.70	355.56	5	469.9	64.5	2

**Ratings and Characteristic Curves (Ta=25°C unless otherwise noted)**

Figure 1. Peak Pulse Power Rating Curve

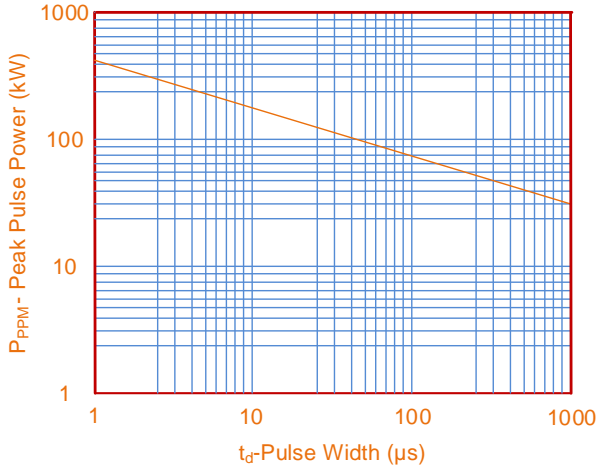


Figure 2. Pulse Derating Curve

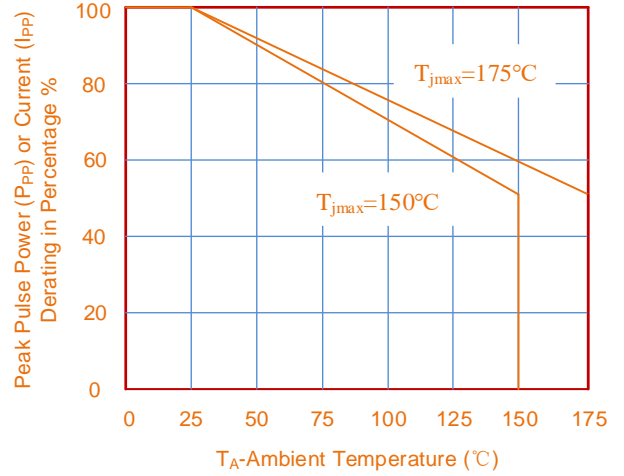


Figure 3. Pulse Waveform

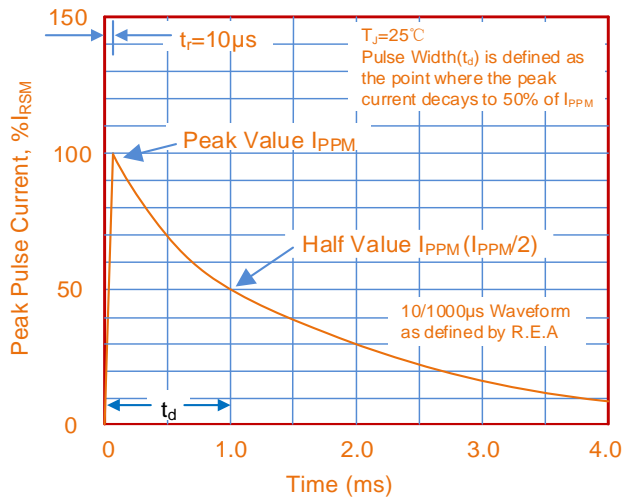


Figure 4. Typical Junction Capacitance

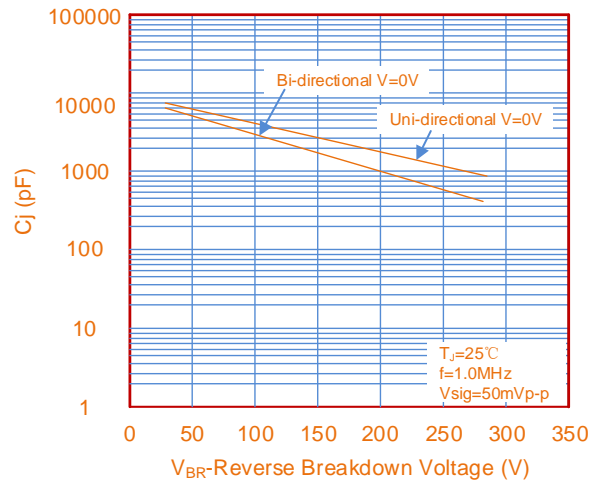


Figure 5. Steady State Power Dissipation Derating Curve


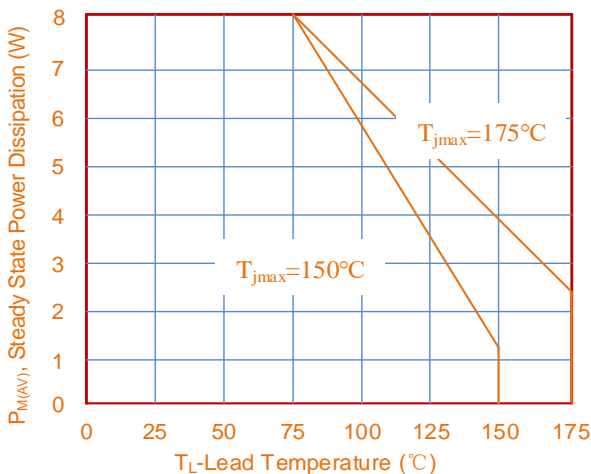



Figure 6. Maximum Non-Repetitive Forward Surge Current Uni-Directional Only




## Marking Code

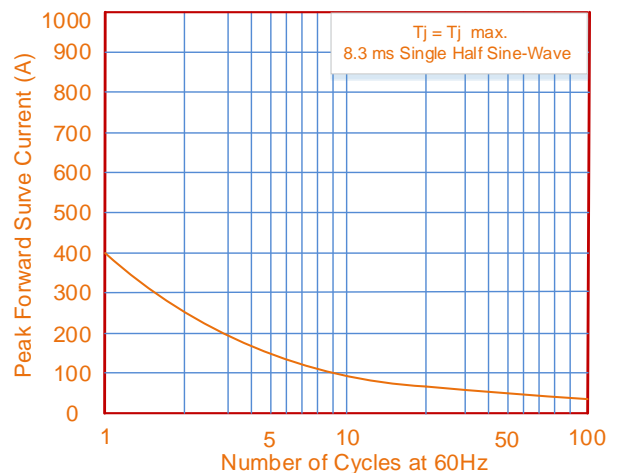

## Part Number Code

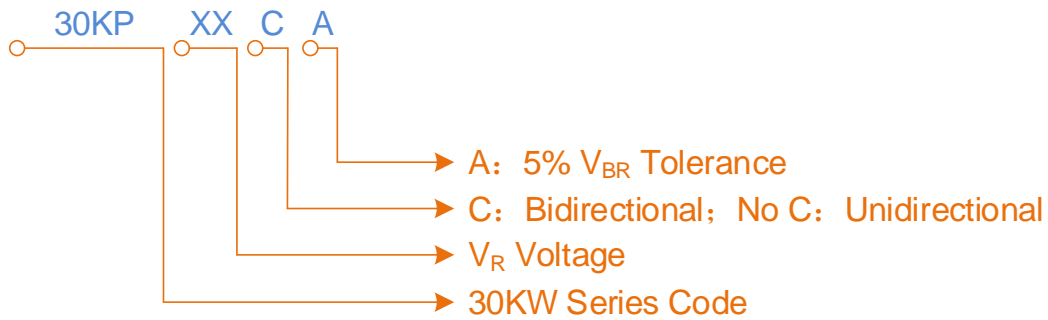


## Soldering Parameters

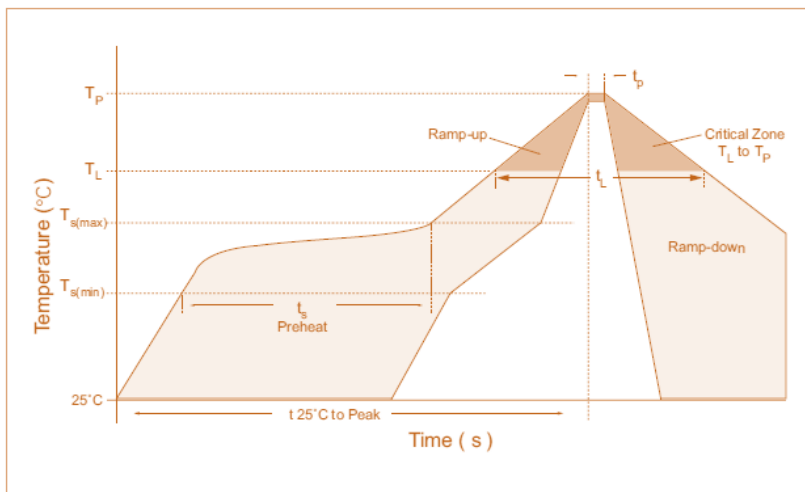

Reflow Condition		Lead-free Soldering
Pre Heat	- Temperature Min ( $T_{s(min)}$ )	150°C
	- Temperature Max ( $T_{s(max)}$ )	200°C
	- Time (min to max) ( $t_s$ )	60 – 180 secs
Average ramp up rate (Liquidus Temp ( $T_A$ ) to peak)		3°C/second max
$T_{s(max)}$ to $T_A$ - Ramp-up Rate		3°C/second max
Reflow	- Temperature ( $T_A$ )	217°C
	- Time (min to max) ( $t_r$ )	60 – 150 seconds
Peak Temperature ( $T_p$ )		260°C
Time within 5°C of actual peak Temperature ( $t_p$ )		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature ( $T_p$ )		8 minutes Max.
Do not exceed Temperature		260°C

### Packaging Specification

Tape

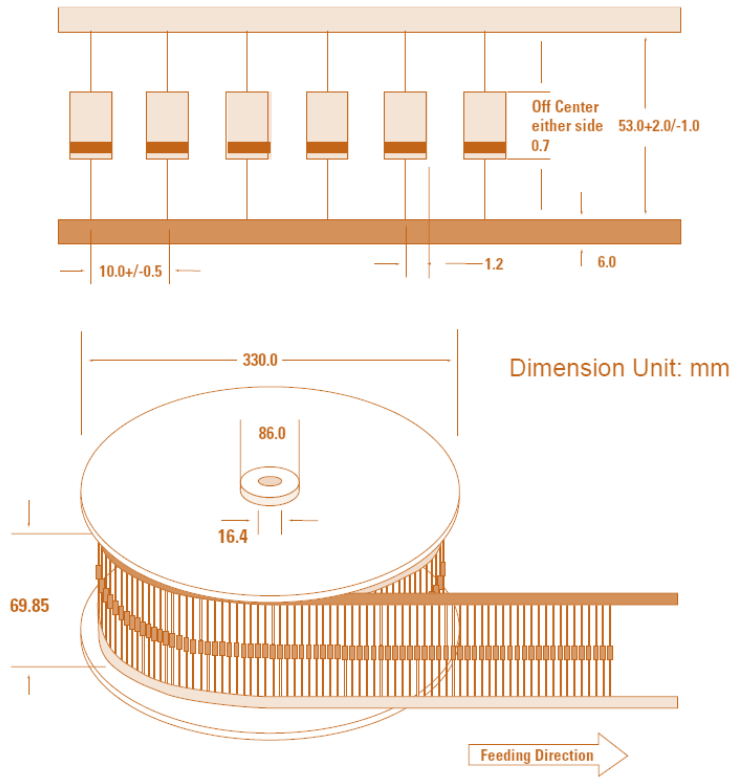

Quantity: 800PCS/Reel