


P6SMB-Q Series

Surface Mount – 600W

 **AUTOMOTIVE GRADE**  **HF**  **RoHS**  **Pb**  **e3**

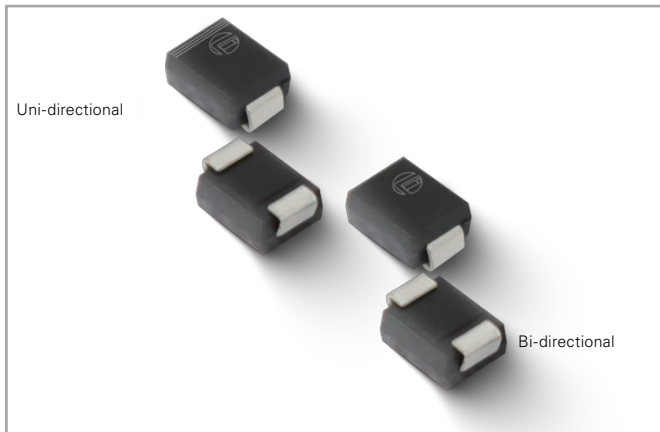

Additional Information



Resources



Accessories



Samples

Agency Approvals

Agency	Agency File Number
	E528309

Maximum Ratings and Thermal Characteristics

(T_A=25 °C unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation by 10/1000µs Waveform(Fig.1)(Note1)(Note2) -Single Die Parts	P _{PPM}	600	W
Power Dissipation on Infinite Heat Sink at T _L =50°C	P _D	5	W
Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3)	I _{FSM}	100	A
Maximum Instantaneous Forward Voltage at 50A for Unidirectional Only (Note 4)	V _F	3.5/5.0	V
Operating Temperature Range	T _J	-55 to 150	°C
Storage Temperature Range	T _{STG}	-55 to 150	°C
Typical Thermal Resistance Junction to Lead	R _{θJL}	20	°C/W
Typical Thermal Resistance Junction to Ambient	R _{θJA}	100	°C/W

Notes:

1. Non-repetitive current pulse, per Fig.3 and derated above T_J (initial) =25°C per Fig.2
2. Mounted on copper pad area of 0.2x0.2" (5.0 x 5.0mm) to each terminal.
3. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum.
4. V_F < 3.5V for single die parts and V_F < 5.0V for stacked-die parts.

Description

The P6SMB-Q series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.


Features

- High reliability application and automotive grade AEC-Q101 qualified
- 600W peak pulse power capability at 10/1000µs waveform, repetition rate (duty cycles):0.01 %
- Excellent clamping capability
- Low incremental surge resistance
- Typical I_R less than 1µA when V_B min>12V
- Optimized surface mount footprint for minimal PCB space impact
- Low profile package
- Typical failure mode due to exceeding maximum ratings is a short circuit condition
- Whisker test conducted based on Table 4a and 4c of JEDEC JESD201A
- ESD protection of data lines in accordance with IEC 61000-4-2, 30kV(Air), 30kV (Contact)
- EFT protection of data lines in accordance with IEC61000-4-4
- Built-in strain relief
- Fast response time: typically less than 1.0ps from 0V to V_B min
- High temperature to reflow soldering guaranteed: 260°C/20~40sec.
- V_B @ T_J= V_B@25°C x (1+ α T x (T_J - 25)) (α T:Temperature Coefficient, typical value is 0.1%)
- Meet MSL level1, per J-STD-020, LF maximum peak of 260°C
- Matte tin lead-free plated
- Halogen free and RoHS compliant
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/JEDEC J-STD 609A.01)

Applications

TVS devices are ideal for the protection of I/O Interfaces, V_{CC} bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.

Functional Diagram

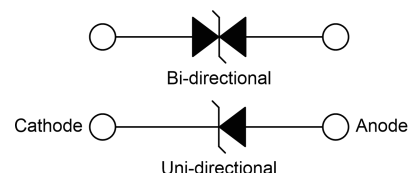

P6SMB-Q Series

Surface Mount – 600W

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Part Number		Type	Device Marking Code		Reverse Stand-Off Voltage	Breakdown Voltage @ I_T		Test Current	Maximum Clamping Voltage @ I_{PP}	Peak Pulse Current	Reverse Leakage @ V_R
Uni.	Bi.		Uni.	Bi.	$V_R(V)$	$V_{B Min.}(V)$	$V_{B Max.}(V)$	$I_T(mA)$	$V_C(V)$	$I_{PP}(A)$	$I_R(\mu A)$
P6SMB6.8A	P6SMB6.8CA	Q	6V8A	6V8C	5.80	6.45	7.14	10	10.5	58.1	1000
P6SMB7.5A	P6SMB7.5CA	Q	7V5A	7V5C	6.40	7.13	7.88	10	11.3	54.0	500
P6SMB8.2A	P6SMB8.2CA	Q	8V2A	8V2C	7.02	7.79	8.61	10	12.1	50.4	200
P6SMB9.1A	P6SMB9.1CA	Q	9V1A	9V1C	7.78	8.65	9.55	1	13.4	45.5	50
P6SMB10A	P6SMB10CA	Q	10A	10C	8.55	9.50	10.50	1	14.5	42.1	10
P6SMB11A	P6SMB11CA	Q	11A	11C	9.40	10.50	11.60	1	15.6	39.1	5
P6SMB12A	P6SMB12CA	Q	12A	12C	10.20	11.40	12.60	1	16.7	36.5	5
P6SMB13A	P6SMB13CA	Q	13A	13C	11.10	12.40	13.70	1	18.2	33.5	1
P6SMB15A	P6SMB15CA	Q	15A	15C	12.80	14.30	15.80	1	21.2	28.8	1
P6SMB16A	P6SMB16CA	Q	16A	16C	13.60	15.20	16.80	1	22.5	27.1	1
P6SMB18A	P6SMB18CA	Q	18A	18C	15.30	17.10	18.90	1	25.2	24.2	1
P6SMB20A	P6SMB20CA	Q	20A	20C	17.10	19.00	21.00	1	27.7	22.0	1
P6SMB22A	P6SMB22CA	Q	22A	22C	18.80	20.90	23.10	1	30.6	19.9	1
P6SMB24A	P6SMB24CA	Q	24A	24C	20.50	22.80	25.20	1	33.2	18.4	1
P6SMB27A	P6SMB27CA	Q	27A	27C	23.10	25.70	28.40	1	37.5	16.3	1
P6SMB30A	P6SMB30CA	Q	30A	30C	25.60	28.50	31.50	1	41.4	14.7	1
P6SMB33A	P6SMB33CA	Q	33A	33C	28.20	31.40	34.70	1	45.7	13.3	1
P6SMB36A	P6SMB36CA	Q	36A	36C	30.80	34.20	37.80	1	49.9	12.2	1
P6SMB39A	P6SMB39CA	Q	39A	39C	33.30	37.10	41.00	1	53.9	11.3	1
P6SMB43A	P6SMB43CA	Q	43A	43C	36.80	40.90	45.20	1	59.3	10.3	1
P6SMB47A	P6SMB47CA	Q	47A	47C	40.20	44.70	49.40	1	64.8	9.4	1
P6SMB51A	P6SMB51CA	Q	51A	51C	43.60	48.50	53.60	1	70.1	8.7	1
P6SMB56A	P6SMB56CA	Q	56A	56C	47.80	53.20	58.80	1	77.0	7.9	1
P6SMB62A	P6SMB62CA	Q	62A	62C	53.00	58.90	65.10	1	85.0	7.2	1
P6SMB68A	P6SMB68CA	Q	68A	68C	58.10	64.60	71.40	1	92.0	6.6	1
P6SMB75A	P6SMB75CA	Q	75A	75C	64.10	71.30	78.80	1	103.0	5.9	1
P6SMB82A	P6SMB82CA	Q	82A	82C	70.10	77.90	86.10	1	113.0	5.4	1
P6SMB91A	P6SMB91CA	Q	91A	91C	77.80	86.50	95.50	1	125.0	4.9	1
P6SMB100A	P6SMB100CA	Q	100A	100C	85.50	95.00	105.00	1	137.0	4.5	1
P6SMB110A	P6SMB110CA	Q	110A	110C	94.00	105.00	116.00	1	152.0	4.0	1
P6SMB120A	P6SMB120CA	Q	120A	120C	102.00	114.00	126.00	1	165.0	3.7	1
P6SMB130A	P6SMB130CA	Q	130A	130C	111.00	124.00	137.00	1	179.0	3.4	1
P6SMB150A	P6SMB150CA	Q	150A	150C	128.00	143.00	158.00	1	207.0	2.9	1
P6SMB160A	P6SMB160CA	Q	160A	160C	136.00	152.00	168.00	1	219.0	2.8	1
P6SMB170A	P6SMB170CA	Q	170A	170C	145.00	162.00	179.00	1	234.0	2.6	1
P6SMB180A	P6SMB180CA	Q	180A	180C	154.00	171.00	189.00	1	246.0	2.5	1
P6SMB200A	P6SMB200CA	Q	200A	200C	171.00	190.00	210.00	1	274.0	2.2	1
P6SMB220A	P6SMB220CA	Q	220A	220C	185.00	209.00	231.00	1	328.0	1.9	1
P6SMB250A	P6SMB250CA	Q	250A	250C	214.00	237.00	263.00	1	344.0	1.8	1
P6SMB300A	P6SMB300CA	Q	300A	300C	256.00	285.00	315.00	1	414.0	1.5	1

Notes:

For bidirectional type having V_R of 10 volts and less, the I_R limit is double.

P6SMB-Q Series

Surface Mount – 600W

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1:
Peak Pulse Power Rating Curve

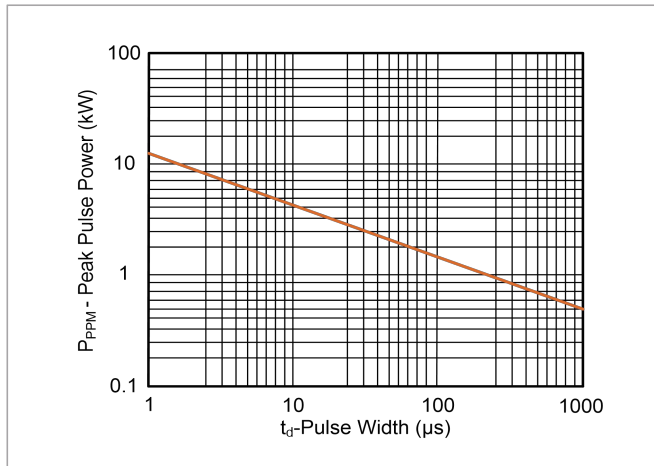


Figure 2:
Pulse Derating Curve

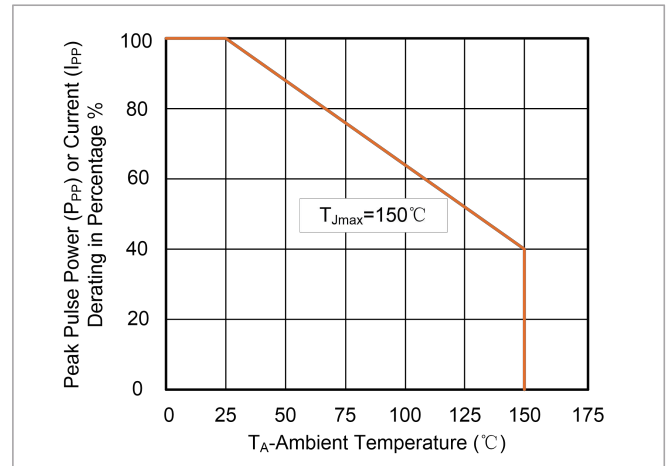


Figure 3:
Pulse Waveform

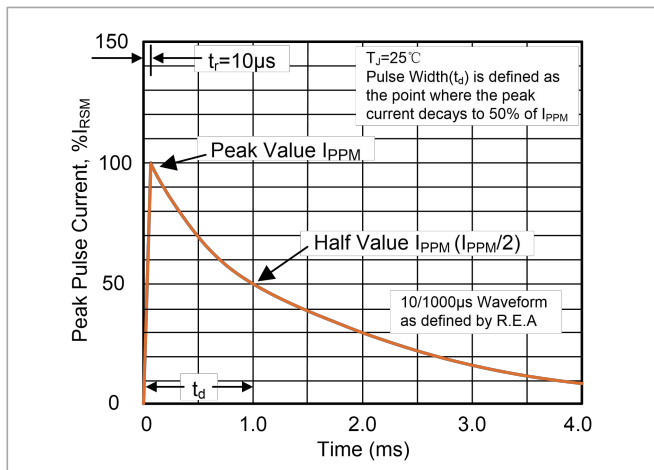


Figure 4:
Typical Junction Capacitance

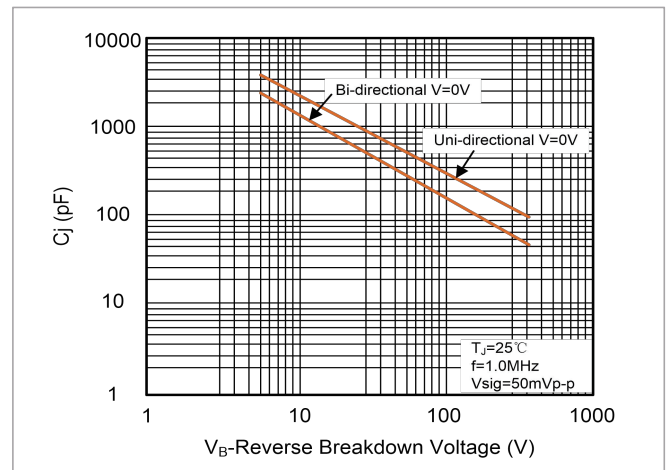


Figure 5:
Steady State Power Dissipation Derating Curve


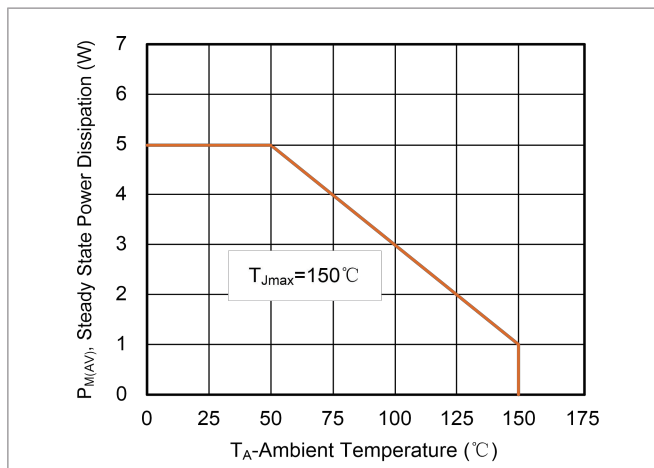


Figure 6:
Maximum Non-Repetitive Forward Surge Current Uni-Directional

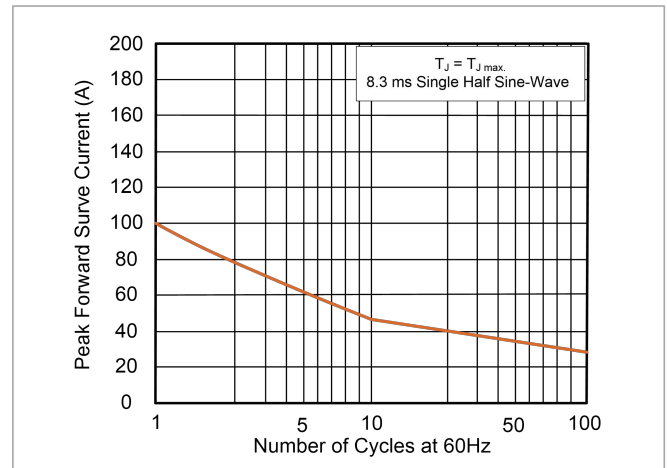


P6SMB-Q Series

Surface Mount – 600W


Soldering Parameters

Reflow Condition		Lead-free assembly
Pre Heat	-Temperature Min ($T_{S\ min}$)	150°C
	-Temperature Max ($T_{S\ max}$)	200°C
	-Time (min to max) (t_s)	60 – 180 secs
Average ramp-up rate(Liquidus Temp (T_L) to peak		3°C/second max.
$T_{S\ (max)}$ to T_L -Ramp-up Rate		3°C/second max.
Reflow	-Temperature (T_L) (Liquidus)	217°C
	-Time (min to max) (t_L)	60-150 seconds
Peak Temperature (T_P)		260°C
Time within 5°C of actual Peak Temperature (t_P)		20-40 seconds
Ramp-down Rate		6°C/second max.
Time 25°C to Peak Temperature		8 minutes max.
Do not exceed		260°C

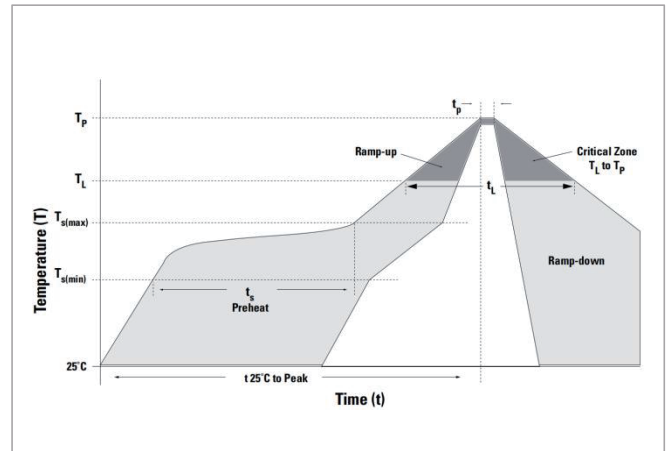


Dimensions

DO-214AA (SMB)

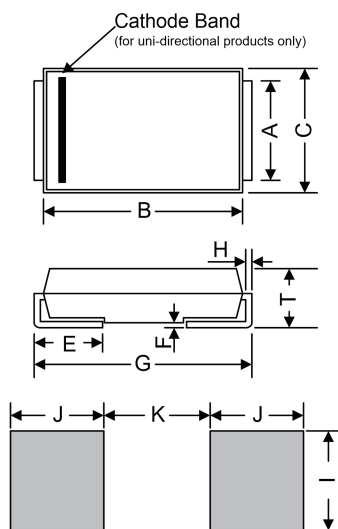


Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.930	2.200	0.076	0.086
B	4.060	4.570	0.160	0.180
C	3.300	3.940	0.130	0.155
E	0.760	1.520	0.030	0.060
F	-	0.203	-	0.008
G	5.100	5.480	0.201	0.216
H	0.152	0.305	0.006	0.012
T	2.160	2.440	0.085	0.096
I	2.260	-	0.089	-
J	2.160	-	0.085	-
K	-	2.740	-	0.107

Part Numbering System

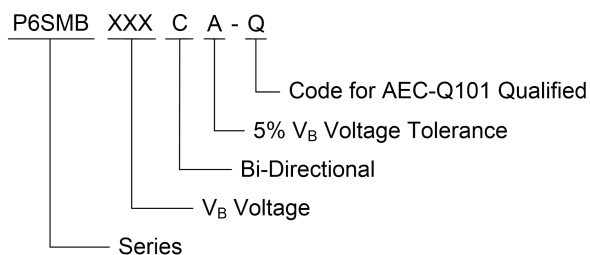

Part Marking System

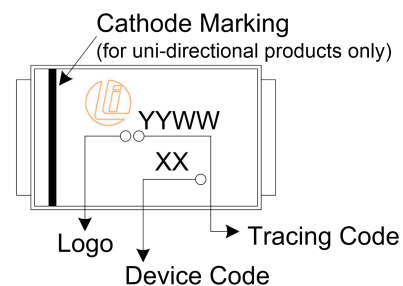


P6SMB-Q Series
Surface Mount – 600W

Packaging


Part number	Component Package	Quantity	Packaging Option	Packaging Specification
P6SMBxxxXX-Q	DO-214AA	3000	Tape & Reel - 12mm tape/13" reel	EIA STD RS-481

Tape and Reel Specification


Tape

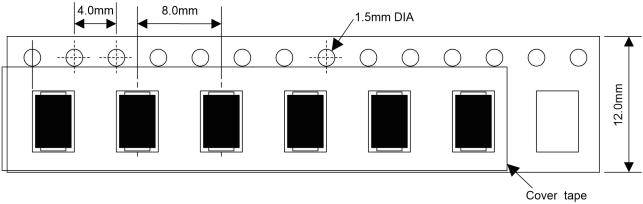

For Uni-Devices

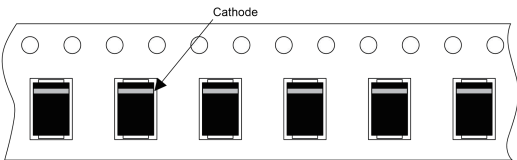

13 Inches Reel

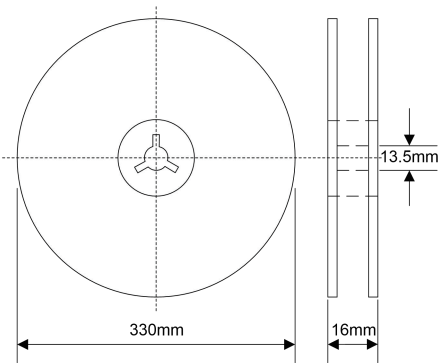

Quantity: 3000ocs/reel

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Liown products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.liownsemi.com>